

FEATURES

- Solenoid valves with three ports in body enabling convenient installation
- Two maximum pressure ratings depending on coil power
- Coils interchangeable without dismantling the valve
- Optional maintained or impulse manual operator
- The solenoid valves satisfy all relevant EC directives

GENERAL

Differential pressure See «SPECIFICATIONS» [1 bar = 100 kPa]
Maximum viscosity 40 cSt (mm²/s)
Response time 5- 20 ms

fluids (*)	temperature range (TS)	seal materials (*)
air, inert gas, water, oil	- 25°C to + 80°C	NBR (nitrile) VMQ (silicone)

MATERIALS IN CONTACT WITH FLUID

(*) Ensure that the compatibility of the fluids in contact with the materials is verified

	Brass body	Stainless steel body
Body	Brass	AISI 316L (1.4404)
Internal parts	Stainless steel, plastic	Stainless steel
Springs	Stainless steel	Stainless steel
Seats	Brass	Brass
Discs	NBR (FPM or EPDM)	NBR (FPM or EPDM)
O'rings	VMQ	VMQ
Disc holder and core guide	POM	POM
Shading coil	Copper	Copper

ELECTRICAL CHARACTERISTICS


Coil insulation class F
Connector Spade plug (cable Ø 6-10 mm)
Connector specification ISO 4400 / EN 175301-803, form A
Electrical safety IEC 335
Electrical enclosure protection Moulded IP65 (EN 60529)
Standard voltages DC (=): 24V - 48V
 AC (~): 24V - 48V - 115V - 230V / 50 Hz
 (Other voltages and 60 Hz on request)

prefix option	power ratings				operator ambient temperature range (TS) (C°)	replacement coil		type ⁽¹⁾
	inrush ~	holding ~	hot/cold =			~	=	
	(VA)	(VA)	(W)	(W)		230 V/50 Hz	24 V DC	
SC	23	14	8	8 / 10,8	-25 to + 60	43005096	43005099	01
	55	23	10,5	9 / 11,2	-25 to + 60	400425-117	400425-142	02


(1) Refer to the dimensional drawings on the following page..

SPECIFICATIONS

pipe size	orifice size	flow coefficient Kv	operating pressure differential (bar)				power coil (W)	catalogue number				options					
			max. (PS)					brass	stainless steel		maintained man. operator	FPM	EPDM				
			min.	air (*)	water/oil (*)				~	=				~	=		
(G*)	(mm)	(m ³ /h) (l/min)		~	=	~	=	~	=	~	=						
NC - Normally closed																	
1/4	2	0,11	1,8	0	16	8	16	8	8	10,8	SCE370A001	SCE370A061	SCE370A031	SCE370A070	MS	V	E
					16	16	16	16	10,5	11,2	SCE370A016	SCE370A016	SCE370A046	SCE370A046	MS	V	E
	2,7	0,2	3,3	0	10	5	10	5	8	10,8	SCE370A002	SCE370A062	SCE370A032	SCE370A071	MS	V	E
					10	10	10	10	10,5	11,2	SCE370A017	SCE370A017	SCE370A047	SCE370A047	MS	V	E
3,8	0,3	5	0	5	2	5	2	8	10,8	SCE370A003	SCE370A063	SCE370A033	SCE370A072	MS	V	E	
				5	5	5	5	10,5	11,2	SCE370A018	SCE370A018	SCE370A048	SCE370A048	MS	V	E	
U - Universal																	
1/4	2	0,11	1,8	0	8	4	8	4	8	10,8	SCE370A011	SCE370A064	SCE370A041	SCE370A073	MS	V	E
					8	8	8	8	10,5	11,2	SCE370A026	SCE370A026	SCE370A056	SCE370A056	MS	V	E
	2,7	0,2	3,3	0	5	2	5	2	8	10,8	SCE370A012	SCE370A065	SCE370A042	SCE370A074	MS	V	E
					5	5	5	5	10,5	11,2	SCE370A027	SCE370A027	SCE370A057	SCE370A057	MS	V	E
3,8	0,3	5	0	2	0,5	2	0,5	8	10,8	SCE370A013	SCE370A066	SCE370A043	SCE370A075	MS	V	E	
				2	2	2	2	10,5	11,2	SCE370A028	SCE370A028	SCE370A058	SCE370A058	MS	V	E	
NO - Normally open																	
1/4	2	0,11	1,8	0	10	-	10	-	8	10,8	SCE370A006	-	SCE370A036	-	MS	V	E
					10	10	10	10	10,5	11,2	SCE370A021	SCE370A021	SCE370A051	SCE370A051	MS	V	E
	2,7	0,2	3,3	0	7	-	7	-	8	-	SCE370A007	-	SCE370A037	-	MS	V	E
					7	7	7	7	10,5	11,2	SCE370A022	SCE370A022	SCE370A052	SCE370A052	MS	V	E
3,8	0,3	5	0	3	-	3	-	8	10,8	SCE370A008	-	SCE370A038	-	MS	V	E	
				3	3	3	3	10,5	11,2	SCE370A023	SCE370A023	SCE370A053	SCE370A053	MS	V	E	

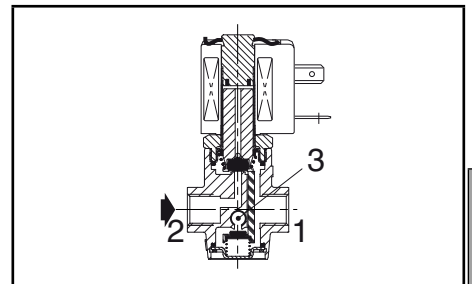

NC function (brass body)

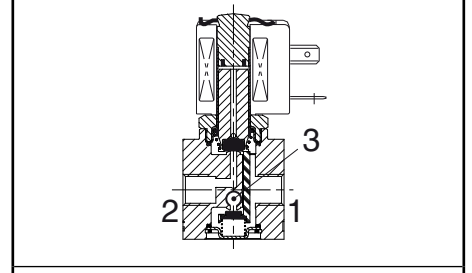

U function (stainless steel body)

OPTIONS

- Valves can also be supplied with FPM (fluoroelastomer) and EPDM (ethylene-propylene) seals and discs. Use the appropriate optional suffix letter for identification
- Waterproof enclosure with embedded screw terminal coil according to protection class IP67, CEE-10 (prefix WP or WS)
- Explosionproof enclosures for use in zones 1/21-2/22, categories 2-3 to ATEX Directive 94/9/EC (see "Explosionproof solenoids" section)
- Class H coil (10,5 W/11,2 W), prefix HT, example: SCHTE370A016
- Impulse or maintained manual operator, suffix MO (brass body valves)
- Oxygen service with seals and disc in FPM, suffix N, example: SCE370A016NV
- Mounting holes on stainless steel version: 2 ØM4, 7 mm depth, available on request, please contact us
- Other pipe connections are available on request
- Plug with visual indication and peak voltage suppression or with cable length of 2 m (see Solenoids, Coils & Accessories section)

INSTALLATION

- The solenoid valves can be mounted in any position without affecting operation
- Brass body solenoid valves have 2 mounting holes in body
- Pipe connections (G*) have standard combination thread according to ISO 228/1 and ISO 7/1
- Installation/maintenance instructions are included with each valve

SPARE PARTS KIT

catalogue number	spare parts kit no.		
	~	=	maintained man. operator
SCE370A001/002/003	C140044	-	C140048
SCE370A031/032/033	C140044	-	C140072
SCE370A016/017/018	C140044	C140044	C140048
SCE370A046/047/048	C140044	C140044	C140072
SCE370A061/062/063	-	C140043	C140048
SCE370A070/071/072	-	C140044	C140072
SCE370A011/012/013	C140047	-	C140048
SCE370A041/042/043	C140047	-	C140072
SCE370A026/027/028	C140047	C140047	C140048
SCE370A056/057/058	C140047	C140047	C140072
SCE370A064/065/066	-	C140046	C140048
SCE370A073/074/075	-	C140046	C140072
SCE370A006/007/008	C140045	-	C140048
SCE370A036/037/038	C140045	-	C140072
SCE370A021/022/023	C140045	C140045	C140048
SCE370A051/052/053	C140045	C140045	C140072

(1) Standard suffixes E and V are also applicable to kits.
- Not available

ORDERING EXAMPLES:

SC	E	370	A	016	MS	230V / 50 Hz
SC	E	370	A	046	V	115V / 50 Hz
SC	E	370	A	002	MS	24V / DC
SC	E	370	A	061		230V / 50 Hz

prefix pipe thread basic number voltage suffix

ORDERING EXAMPLES KITS:

C140044 ⁽¹⁾	
C140043	V
C140045	E

basic number suffix

DIMENSIONS (mm), WEIGHT (kg)




TYPE 01-02
Prefix "SC" Solenoid
Epoxy moulded
IEC 335 / ISO 4400
IP65

Type 01: SCE370A001/002/003/061/062/063/011/012/013/
064/065/066/006/007/008

Type 02: SCE370A016/017/018/026/027/028/021/022/023

Type 01: SCE370031/032/033/070/071/072/041/042/043/
073/074/075/036/037/038

Type 02: SCE370A046/047/048/056/057/058/051/052/053

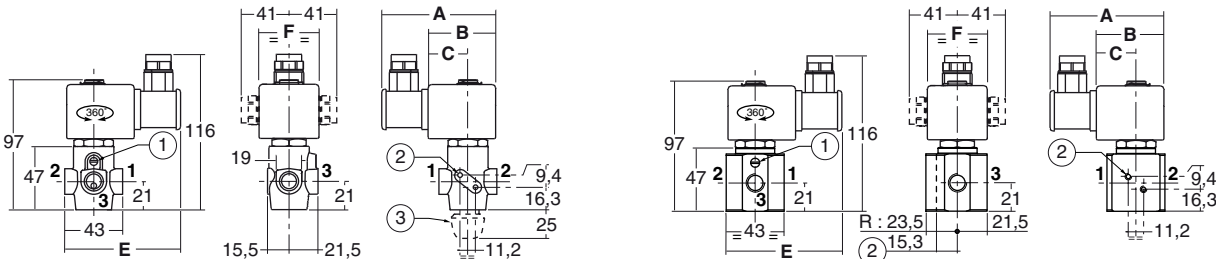

type	prefix option	catalogue number	A	B	C	E	F	weight ⁽²⁾
01	SC	SCE370A001/002/003/061/062/063/ 011/012/013/064/065/066/006/007/008	70	35	20	77	30	0,430 ⁽³⁾
		SCE370031/032/033/070/071/072/ 041/042/043/073/074/075/036/037/038	70	35	20	77	30	0,670
02	SC	SCE370A016/017/018/026/027/028/ 021/022/023	85	50	30	86	45	0,600 ⁽³⁾
		SCE370A046/047/048/056/057/058/ 051/052/053	85	50	30	86	45	0,820

(2) including coil and connector. (3) +0,030 kg with push-turn manual operator.

- 1 Manual operator location.
- 2 Mounting 2 Ø M4, 7 mm depth (Option with stainless steel body valves).
- 3 Impulse or maintained manual operator (suffix MO).

All leaflets are available on: www.asconumatics.eu